

# Rhythm Horizontal


Design by Arik Levy

Evoking the mood of Zen minimalism, Rhythm features slender light modules of varying lengths, each fitted with an LED module, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, Rhythm represents the ultimate in customised lighting.

---

## Pendants

2110




45 x 47 cm

2120



93 x 47 cm

2111



93 x 47 cm

2112



141 x 47 cm

2113



189 x 47 cm

2121



131 x 87 cm

2122




199 x 87 cm



# Rhythm Horizontal

2111



**Finishes**

- **14/** \_\_ Chocolate (RAL 8019)
- **58/** \_\_ Off-white (NCS S 1000-N)

**LED temperature colour**

- /1** \_ 2700 K CRI >90 8664 lm 144 lm/W
- /3** \_ 3500 K CRI >90 9157,3 lm 152,6 lm/W

**Control**

- 2111** \_\_ / \_ 1 DALI
- 2111** \_\_ / \_ 3 1-10V
- 2111** \_\_ / \_ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

20 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,1570 m<sup>3</sup>  
Gross weight 14,2 Kg Net weight 10,5 Kg

**Notes**

Built-in accessory (96 mm) chocolate.  
Built-in accessory (96 mm) off-white.  
Surface and built-in fitting



2112



**Finishes**

- **14/** \_\_ Chocolate (RAL 8019)
- **58/** \_\_ Off-white (NCS S 1000-N)

**LED temperature colour**

- /1** \_ 2700 K CRI >90 12996 lm 144 lm/W
- /3** \_ 3500 K CRI >90 13736 lm 152,6 lm/W

**Control**

- 2112** \_\_ / \_ 1 DALI
- 2112** \_\_ / \_ 3 1-10V
- 2112** \_\_ / \_ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

30 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,0430 m<sup>3</sup>  
Gross weight 10,3 Kg Net weight 7 Kg

**Notes**

Built-in accessory (44,5 mm) chocolate.  
Built-in accessory (44,5 mm) off-white.  
Surface and built-in fitting



2113



**Finishes**

- **14/** \_\_ Chocolate (RAL 8019)
- **58/** \_\_ Off-white (NCS S 1000-N)

**LED temperature colour**

- /1** \_ 2700 K CRI >90 17328 lm 144 lm/W
- /3** \_ 3500 K CRI >90 18314,6 lm 152,6 lm/W

**Control**

- 2113** \_\_ / \_ 1 DALI
- 2113** \_\_ / \_ 3 1-10V
- 2113** \_\_ / \_ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

40 x LED STRIP 30V 2,9 W  
Constant Voltage 30V  
100-240V 50/60Hz

**Packaging**


2 Boxes  
Total Vol 0,1900 m<sup>3</sup>  
Gross weight 17,2 Kg Net weight 13,5 Kg

**Notes**

Built-in accessory (44,5 mm) chocolate.  
Built-in accessory (44,5 mm) off-white.  
Surface and built-in fitting



2120



- Finishes**
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-white (NCS S 1000-N)

- LED temperature colour**
- /1\_ 2700 K CRI >90 7602,4 lm 127 lm/W
  - /3\_ 3500 K CRI >90 8035,3 lm 133,9 lm/W

- Control**
- 2120 \_\_ / \_ 1 DALI
  - 2120 \_\_ / \_ 3 1-10V
  - 2120 \_\_ / \_ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

10 x LED STRIP 30V 5,8 W  
 Constant Voltage 30V  
 100-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,1380 m<sup>3</sup>  
 Gross weight 9,5 Kg Net weight 7,3 Kg

**Notes**

Built-in accessory (136 mm) chocolate.  
 Built-in accessory (136 mm) off-white.  
 Surface and built-in fitting



2121



- Finishes**
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-white (NCS S 1000-N)

- LED temperature colour**
- /1\_ 2700 K CRI >90 15204,8 lm 127 lm/W
  - /3\_ 3500 K CRI >90 16070,6 lm 133,9 lm/W

- Control**
- 2121 \_\_ / \_ 1 DALI
  - 2121 \_\_ / \_ 3 1-10V
  - 2121 \_\_ / \_ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

20 x LED STRIP 30V 5,8 W  
 Constant Voltage 30V  
 100-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,1664 m<sup>3</sup>  
 Gross weight 14,7 Kg Net weight 10,5 Kg

**Notes**

Built-in accessory (44,5 mm) chocolate.  
 Built-in accessory (44,5 mm) off-white.  
 Surface and built-in fitting



2122



- Finishes**
- 14/ \_\_ Chocolate (RAL 8019)
  - 58/ \_\_ Off-white (NCS S 1000-N)

- LED temperature colour**
- /1\_ 2700 K CRI >90 22807,2 lm 127 lm/W
  - /3\_ 3500 K CRI >90 24105,8 lm 133,9 lm/W

- Control**
- 2122 \_\_ / \_ 3 1-10V

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

30 x LED STRIP 30V 5,8 W  
 Constant Voltage 30V  
 100-240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,07120 m<sup>3</sup>  
 Gross weight 24 Kg Net weight 21,5 Kg

**Notes**

Built-in accessory (44,5 mm) chocolate.  
 Built-in accessory (44,5 mm) off-white.  
 Surface and built-in fitting



# Rhythm Vertical


Design by Arik Levy

Evoking the mood of Zen minimalism, Rhythm features slender light modules of varying lengths, each fitted with an LED module, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, Rhythm represents the ultimate in customised lighting.


## Pendants



Each project is unique.  
Personalise your own  
Rhythm composition  
quick and easy.

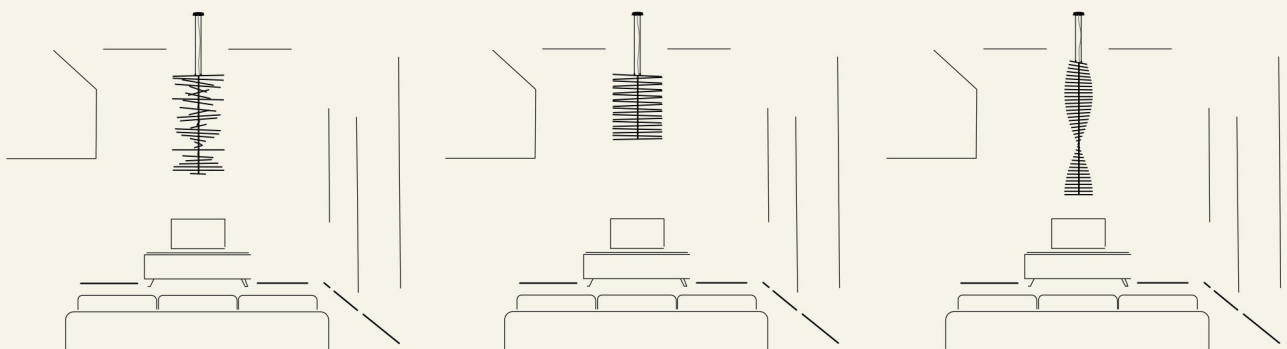

2141



<b>Finishes</b>	<b>LED temperature colour</b>
● <b>14/ _ _ Chocolate</b> (RAL 8019)	/1_ 2700 K  CRI >90 8664 lm 144 lm/W
● <b>58/ _ _ Off-white</b> (NCS S 1000-N)	/3_ 3500 K  CRI >90 9157,3 lm 152,6 lm/W

<b>Control</b>
2141 _ _ / _ 1 DALI
2141 _ _ / _ 3 1-10V
2141 _ _ / _ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

20 x LED STRIP 30V 2,9 W  
 Constant Voltage 30V  
 100-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,5850 m<sup>3</sup>  
 Gross weight 10,3 Kg Net weight 7,4 Kg

**Notes**

Built-in accessory (96 mm) chocolate.  
 Built-in accessory (96 mm) off-white.  
 Surface and built-in fitting



2142



<b>Finishes</b>	<b>LED temperature colour</b>
● <b>14/ _ _ Chocolate</b> (RAL 8019)	/1_ 2700 K  CRI >90 12996 lm 144 lm/W
● <b>58/ _ _ Off-white</b> (NCS S 1000-N)	/3_ 3500 K  CRI >90 13736 lm 152,6 lm/W

<b>Control</b>
2142 _ _ / _ 1 DALI
2142 _ _ / _ 3 1-10V
2142 _ _ / _ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

30 x LED STRIP 30V 2,9 W  
 Constant Voltage 30V  
 100-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,6239 m<sup>3</sup>  
 Gross weight 13,7 Kg Net weight 8,2 Kg

**Notes**

Built-in accessory (96 mm) chocolate.  
 Built-in accessory (96 mm) off-white.  
 Surface and built-in fitting



2143



<b>Finishes</b>	<b>LED temperature colour</b>
● <b>14/ _ _ Chocolate</b> (RAL 8019)	/1_ 2700 K  CRI >90 8664 lm 144 lm/W
● <b>58/ _ _ Off-white</b> (NCS S 1000-N)	/3_ 3500 K  CRI >90 9157,3 lm 152,6 lm/W

<b>Control</b>
2143 _ _ / _ 1 DALI
2143 _ _ / _ 3 1-10V
2143 _ _ / _ Z Casambi

**Materials**

Stick: Polyamide 6 with 10% of Fiberglass.  
 Diffuser: Polycarbonate. Canopy: Steel.

**Light Source and electronics**

40 x LED STRIP 30V 2,9 W  
 Constant Voltage 30V  
 100-240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,6600 m<sup>3</sup>  
 Gross weight 16,9 Kg Net weight 13 Kg

**Notes**

Built-in accessory (96 mm) chocolate.  
 Built-in accessory (96 mm) off-white.  
 Surface and built-in fitting

