


Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.


Pendants

2350

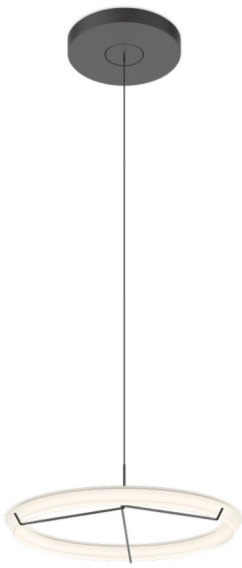


ø 56,3 cm

2351

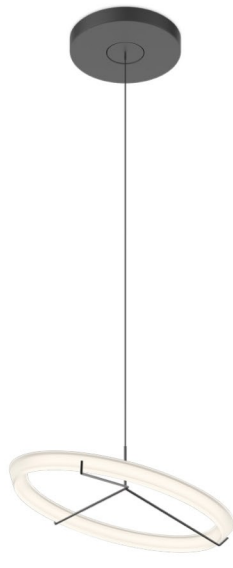


ø 56,3 cm

2355




max. 350 cm

2356




max. 350 cm

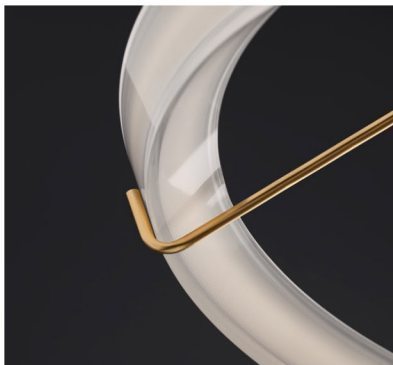

1160 10 /1A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants

2350

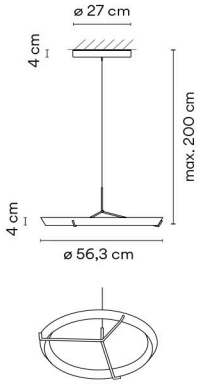

Finishes
● 11/ __ Black
(NCS S 8500-N)

LED temperature colour
/2 _ 3000 K
CRI >80 2024 lm 88 lm/W

Control
2350 __ / _ 1
DALI

2350 __ / _ 3
1-10V

2350 __ / _ Z
Casambi

Finishes
● 20/ __ Gold
(Gold)

LED temperature colour
/2 _ 3000 K
CRI >80 2024 lm 88 lm/W

Control
2350 __ / _ 1
DALI

2350 __ / _ 3
1-10V

2350 __ / _ Z
Casambi

Materials
Diffuser: Methacrylate. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.


Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100-277V 50/60Hz

Packaging
1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes
Extra cable length. 16,00 €/m

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

2351

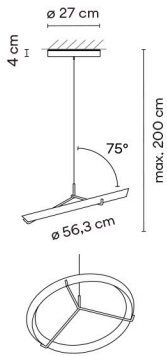

Finishes
● 11/ __ Black
(NCS S 8500-N)

LED temperature colour
/2 _ 3000 K
CRI >80 2024 lm 88 lm/W

Control
2351 __ / _ 1
DALI

2351 __ / _ 3
1-10V

2351 __ / _ Z
Casambi

Finishes
● 20/ __ Gold
(Gold)

LED temperature colour
/2 _ 3000 K
CRI >80 2024 lm 88 lm/W

Control
2351 __ / _ 1
DALI

2351 __ / _ 3
1-10V

2351 __ / _ Z
Casambi

Materials
Diffuser: Methacrylate. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.


Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100-277V 50/60Hz

Packaging
1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes
Extra cable length. 16,00 €/m

Electrical connection
Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro
for plaster ceilings
_32 Remote XXS
for all types of drop ceilings

2355



Finishes	LED temperature colour	Control
● 11/ __ Black (NCS S 8500-N)	/2 _ 3000 K CRI >80 1224 lm 80 lm/W	2355 __ / _ 1 DALI 2355 __ / _ 3 1-10V 2355 __ / _ Z Casambi
● 20/ __ Gold (Gold)	/2 _ 3000 K CRI >80 1224 lm 80 lm/W	2355 __ / _ 1 DALI 2355 __ / _ 3 1-10V 2355 __ / _ Z Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220-240V 50/60Hz

Packaging


1 Box 0,13 x 0,19 x 1,265 m
Vol 0,0312 m³
Gross weight 5 Kg Net weight 4,1 Kg



Electrical connection

- Surface
- _18 Free Wire
- _23 Built-in
- _31 Remote Micro for plaster ceilings
- _32 Remote XXS for all types of drop ceilings

2356



Finishes	LED temperature colour	Control
● 11/ __ Black (NCS S 8500-N)	/2 _ 3000 K CRI >80 3672 lm 80 lm/W	2356 __ / _ 1 DALI 2356 __ / _ 3 1-10V 2356 __ / _ Z Casambi
● 20/ __ Gold (Gold)	/2 _ 3000 K CRI >80 3672 lm 80 lm/W	2356 __ / _ 1 DALI 2356 __ / _ 3 1-10V 2356 __ / _ Z Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100-277V 50/60Hz

Packaging

1 Box 0,31 x 0,33 x 2 m
Vol 0,2046 m³
Gross weight 7,4 Kg Net weight 6,06 Kg


Notes

Extra cable length. 16,00 €/m



Composing pendants


Next sketches are composed by one or more compositions

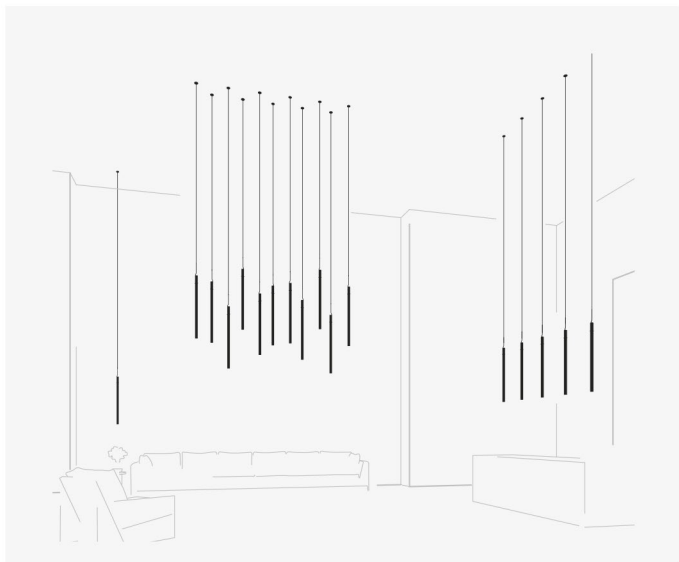

17 x 2355.



1 x 2350 and 2 x 2351.

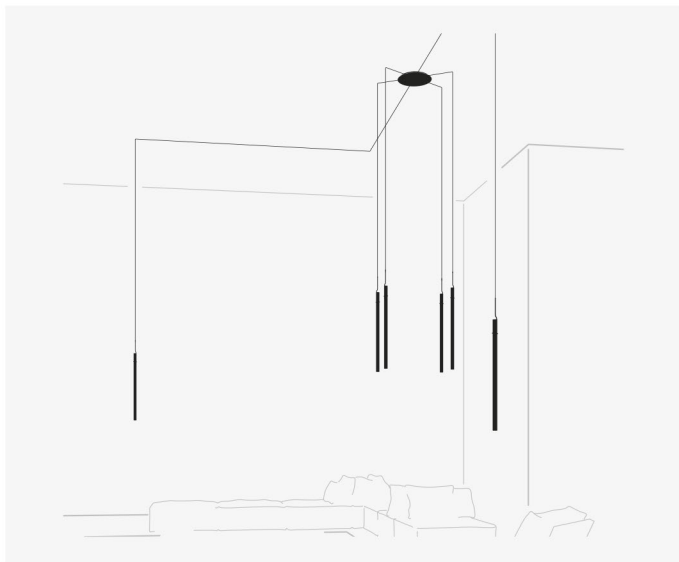

6 x 2355.

Each project is unique.
Visit vibia.com and
chose among multiple
compositions designed
and adapted to your
project needs.

Personalise your own
Halo composition quick
and easy at vibia.com



Electrical connection options for models 2350 / 2351 / 2355

Choose your preferred installation option
according to your needs.
For each composition, the optimal minimum
number of drivers will be delivered.

Drop ceiling


The innovative remote and built-in fittings accentuate
the silkiness and lightness of compositions on
suspended ceilings, its great visual grandeur taking
center stage.

For Ref. 2350 / 2351 / 2355

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings.
Black finish.




XXS ø 6 cm
height 6 cm
for all types of drop
ceilings. Match with
fixture finish.

Built-in



ø 8 cm
height 6 cm
match with
fixture finish.



Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 2350 / 2351


Surface



ø 27 cm


match with
fixture finish.

Free Wire




1 wire

ø 22 cm



2 - 6 wires

ø 36 cm



7 - 9 wires

ø 40 cm

For Ref. 2355


Surface



ø 16 cm


match with
fixture finish.

Free Wire




1 wire

ø 20 cm



2 - 6 wires

ø 36 cm



7 - 9 wires

ø 40 cm

you can choose the finish of the canopy
among black, white or any colour
matching one of the pendants.

