

Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art is comprised of different disks to create a warm, visually sharp and mathematically creative effect. There are four sizes of disks, allowing the designer to play with varied combinations of indirect light. The resulting design comprises a set of highly dynamic, sculptural compositions.

Wall



ø 30 cm

5470



ø 40 cm

5471



ø 45 cm

5472



ø 46 cm

5474




ø 60 cm

5476



58 cm

5480



69 cm

5481




68 cm

5485



87 cm

5487

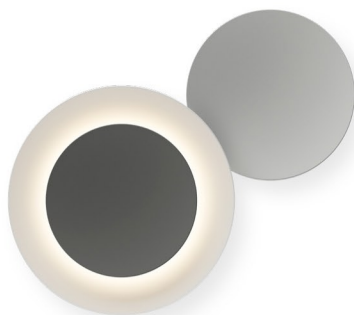

87 cm


5486




103 cm

5491

Each project is unique.
 Personalise your own
 Puck Wall Art composition
 quick and easy.

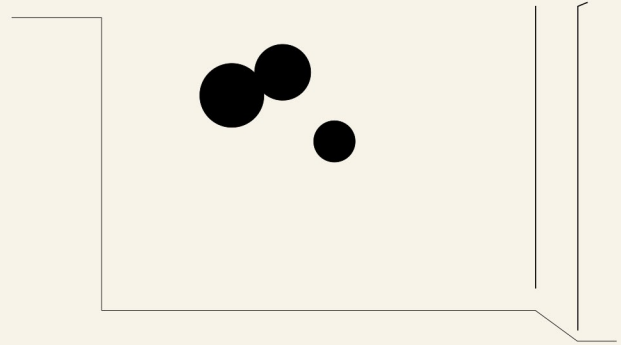

5470



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 952,5 lm 113 lm/W	5970 __ / _ 1 DALI-2
● 21/ __ Black Grey (NCS S 7000-N)	/3_ 3500 K CRI >90 1017,4 lm 121,1 lm/W	5970 __ / _ 3 1-10V
● 28/ __ Brown M1 (NCS S 4020-Y60R)		5970 __ / _ 4 Triac
		5970 __ / _ 5 Push
		5970 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 76/ __ Grey Felt L1	/1_ 2700 K CRI >90 952,5 lm 113 lm/W	5970 __ / _ 1 DALI-2
● 77/ __ Grey Felt D1	/3_ 3500 K CRI >90 1017,4 lm 121,1 lm/W	5970 __ / _ 3 1-10V
		5970 __ / _ 4 Triac
		5970 __ / _ 5 Push
		5970 __ / _ Z Casambi

Materials
 Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics
 1 x LED STRIP 8,4 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz


Packaging
 1 Box 0,34 x 0,34 x 0,23 m
 Vol 0,0266 m³
 Gross weight 2,6 Kg Net weight 1,6 Kg

Notes
 A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



Puck Wall Art

5471



- Finishes**
- **15/** __ Grey L2
(NCS S 2500-N)
 - **21/** __ Black Grey
(NCS S 7000-N)
 - **28/** __ Brown M1
(NCS S 4020-Y60R)

- LED temperature colour**
- /1 _ 2700 K
CRI >90 1435,9 lm 114 lm/W
 - /3 _ 3500 K
CRI >90 1533,8 lm 121,7 lm/W

- Control**
- 5471 __ / _ 1
DALI-2
 - 5471 __ / _ 3
1-10V
 - 5471 __ / _ 4
Triac
 - 5471 __ / _ 5
Push
 - 5471 __ / _ Z
Casambi

- Finishes**
- **76/** __ Grey Felt L1
 - **77/** __ Grey Felt D1

- LED temperature colour**
- /1 _ 2700 K
CRI >90 1435,9 lm 114 lm/W
 - /3 _ 3500 K
CRI >90 1533,8 lm 121,7 lm/W

- Control**
- 5471 __ / _ 1
DALI-2
 - 5471 __ / _ 3
1-10V
 - 5471 __ / _ 4
Triac
 - 5471 __ / _ 5
Push
 - 5471 __ / _ Z
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

- 1 x LED STRIP 12,6 W 700 mA
- Constant Current 700 mA
- / _ 1 110~240V 50/60Hz Bi-volt
- / _ 3 110~240V 50/60Hz Bi-volt
- / _ 5 110~240V 50/60Hz Bi-volt
- / _ 4 220~240V 50/60Hz
- / _ Z 220~240V 50/60Hz

Packaging


1 Box 0,44 x 0,44 x 0,25 m
Vol 0,0484 m³
Gross weight 3,5 Kg Net weight 1,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5472



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5472 __ / _ 1 DALI-2
● 21/ __ Black Grey (NCS S 7000-N)	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5472 __ / _ 3 1-10V
● 28/ __ Brown M1 (NCS S 4020-Y60R)		5472 __ / _ 4 Triac
		5472 __ / _ 5 Push
		5471 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 76/ __ Grey Felt L1	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5472 __ / _ 1 DALI-2
● 77/ __ Grey Felt D1	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5472 __ / _ 3 1-10V
		5472 __ / _ 4 Triac
		5472 __ / _ 5 Push
		5472 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,26 m
 Vol 0,0676 m³
 Gross weight 4,75 Kg Net weight 2,25 Kg


Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

Puck Wall Art

5474



- Finishes**
- **15/** __ __ Grey L2
(NCS S 2500-N)
 - **21/** __ __ Black Grey
(NCS S 7000-N)
 - **28/** __ __ Brown M1
(NCS S 4020-Y60R)

- LED temperature colour**
- /1 _ 2700 K
CRI >90 952,5 lm 113 lm/W
 - /3 _ 3500 K
CRI >90 1017,4 lm 121,1 lm/W

- Control**
- 5474 __ / _ 1
DALI-2
 - 5474 __ / _ 3
1-10V
 - 5474 __ / _ 4
Triac
 - 5474 __ / _ 5
Push
 - 5474 __ / _ Z
Casambi

- Finishes**
- **71/** __ __ Grey Felt L1
& Grey Felt D1
 - **76/** __ __ Grey Felt L1

- LED temperature colour**
- /1 _ 2700 K
CRI >90 952,5 lm 113 lm/W
 - /3 _ 3500 K
CRI >90 1017,4 lm 121,1 lm/W

- Control**
- 5474 __ / _ 1
DALI-2
 - 5474 __ / _ 3
1-10V
 - 5474 __ / _ 4
Triac
 - 5474 __ / _ 5
Push
 - 5474 __ / _ Z
Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

- 1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA
- / _ 1 110~240V 50/60Hz Bi-volt
- / _ 3 110~240V 50/60Hz Bi-volt
- / _ 5 110~240V 50/60Hz Bi-volt
- / _ 4 220~240V 50/60Hz
- / _ Z 220~240V 50/60Hz

Packaging


1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5476



Finishes	LED temperature colour	Control
● 15/ __ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5476 __ / _ 1 DALI-2
● 21/ __ __ Black Grey (NCS S 7000-N)	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5476 __ / _ 3 1-10V
● 28/ __ __ Brown M1 (NCS S 4020-Y60R)		5476 __ / _ 4 Triac
		5476 __ / _ 5 Push
		5476 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ __ Grey Felt L1 & Grey Felt D1	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5476 __ / _ 1 DALI-2
● 76/ __ __ Grey Felt L1	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5476 __ / _ 3 1-10V
		5476 __ / _ 4 Triac
		5476 __ / _ 5 Push
		5476 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz

Packaging


1 Box 0,66 x 0,66 x 0,235 m
 Vol 0,1024 m³
 Gross weight 6,3 Kg Net weight 2,9 Kg



Notes


A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

Puck Wall Art

5480



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1 _ 2700 K 	5480 __ / _ 1 DALI-2
● 28/ __ Brown M1 (NCS S 4020-Y60R)	/3 _ 3500 K 	5480 __ / _ 3 1-10V
● 72/ __ Grey D1 & Grey L2	CRI >90 2388,4 lm 114 lm/W	5480 __ / _ 4 Triac
	CRI >90 2551,3 lm 121,5 lm/W	5480 __ / _ 5 Push
		5480 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K 	5480 __ / _ 1 DALI-2
● 76/ __ Grey Felt L1	/3 _ 3500 K 	5480 __ / _ 3 1-10V
	CRI >90 2388,4 lm 114 lm/W	5480 __ / _ 4 Triac
	CRI >90 2551,3 lm 121,5 lm/W	5480 __ / _ 5 Push
		5480 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging


1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m³
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

5481



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1 _ 2700 K CRI >90 2871,9 lm 114 lm/W	5481 __ / _ 1 DALI-2
● 28/ __ Brown M1 (NCS S 4020-Y60R)	/3 _ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5481 __ / _ 3 1-10V
● 72/ __ Grey D1 & Grey L2		5481 __ / _ 4 Triac
		5481 __ / _ 5 Push
		5481 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K CRI >90 2871,9 lm 114 lm/W	5481 __ / _ 1 DALI-2
● 76/ __ Grey Felt L1	/3 _ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5481 __ / _ 3 1-10V
		5481 __ / _ 4 Triac
		5481 __ / _ 5 Push
		5481 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz


Packaging

1 Box 0,46 x 0,46 x 0,4 m
 Vol 0,0846 m³
 Gross weight 6,1 Kg Net weight 3,4 Kg



Puck Wall Art

5485



Finishes

- 72/ __ Grey D1 & Grey L2
- 73/ __ Brown M1 & Grey D1)

LED temperature colour

- /1 _ 2700 K CRI >90 2388,4 lm 114 lm/W
- /3 _ 3500 K CRI >90 2551,3 lm 121,5 lm/W

Control

- 5485 __ / _ 1 DALI-2
- 5485 __ / _ 3 1-10V
- 5485 __ / _ 4 Triac
- 5485 __ / _ 5 Push
- 5485 __ / _ Z Casambi

Finishes

- 71/ __ Grey Felt L1 & Grey Felt D1

LED temperature colour

- /1 _ 2700 K CRI >90 2388,4 lm 114 lm/W
- /3 _ 3500 K CRI >90 2551,3 lm 121,5 lm/W

Control

- 5485 __ / _ 1 DALI-2
- 5485 __ / _ 3 1-10V
- 5485 __ / _ 4 Triac
- 5485 __ / _ 5 Push
- 5485 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.


Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,43 m
Vol 0,1118 m³
Gross weight 8,42 Kg Net weight 4,22 Kg

5486



Finishes	LED temperature colour	Control
● 72/ __ Grey D1 & Grey L2	/1 _ 2700 K CRI >90 2871,9 lm 114 lm/W	5486 __ / _ 1 DALI-2
● 73/ __ Brown M1 & Grey D1)	/3 _ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5486 __ / _ 3 1-10V
		5486 __ / _ 4 Triac
		5486 __ / _ 5 Push
		5486 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K CRI >90 2871,9 lm 114 lm/W	5486 __ / _ 1 DALI-2
	/3 _ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5486 __ / _ 3 1-10V
		5486 __ / _ 4 Triac
		5486 __ / _ 5 Push
		5486 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics

2 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA

- / _ 1 110~240V 50/60Hz Bi-volt
- / _ 3 110~240V 50/60Hz Bi-volt
- / _ 5 110~240V 50/60Hz Bi-volt
- / _ 4 220~240V 50/60Hz
- / _ Z 220~240V 50/60Hz


Packaging

1 Box 0,66 x 0,66 x 0,5 m
 Vol 0,2178 m³
 Gross weight 11,35 Kg Net weight 5,45 Kg





Puck Wall Art

5487





Finishes
 ● **21/** __ Black Grey
 (NCS S 7000-N)
 ● **73/** __ Brown M1
 & Grey D1

LED temperature colour
 /1 _ 2700 K 
 CRI >90 2388,4 lm 114 lm/W
 /3 _ 3500 K 
 CRI >90 2551,3 lm 121,5 lm/W

Control
 5487 __ / _ 1
 DALI-2
 5487 __ / _ 3
 1-10V
 5487 __ / _ 4
 Triac
 5487 __ / _ 5
 Push
 5471 __ / _ Z
 Casambi

Finishes
 ● **71/** __ Grey Felt L1
 & Grey Felt D

LED temperature colour
 /1 _ 2700 K 
 CRI >90 2388,4 lm 114 lm/W
 /3 _ 3500 K 
 CRI >90 2551,3 lm 121,5 lm/W

Control
 5487 __ / _ 1
 DALI-2
 5487 __ / _ 3
 1-10V
 5487 __ / _ 4
 Triac
 5487 __ / _ 5
 Push
 5487 __ / _ Z
 Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics


1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
 Vol 0,2178 m³
 Gross weight 11,52 Kg Net weight 5,62 Kg

5491



Finishes	LED temperature colour	Control
● 72/ __ Grey D1 & Grey L2	/1_ 2700 K CRI >90 4307,8 lm 114 lm/W	5491 __ / _ 1 DALI-2
● 73/ __ Brown M1 & Grey D1	/3_ 3500 K CRI >90 4601,5 lm 121,7 lm/W	5491 __ / _ 3 1-10V
		5491 __ / _ 4 Triac
		5491 __ / _ 5 Push
		5491 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1_ 2700 K CRI >90 4307,8 lm 114 lm/W	5491 __ / _ 1 DALI-2
	/3_ 3500 K CRI >90 4601,5 lm 121,7 lm/W	5491 __ / _ 3 1-10V
		5491 __ / _ 4 Triac
		5491 __ / _ 5 Push
		5491 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
 Vol 0,2919 m³
 Gross weight 14,85 Kg Net weight 7,35 Kg

