

## Specification description

### Description

O Lighting System

O LED Source


## Lighting fixture description

Degree of protection IP/IK

IP20

Color / finish

Metal: antique brass or RAL powder-coated  
Acrylic: prismatic PMMA diffuser for diffuse light

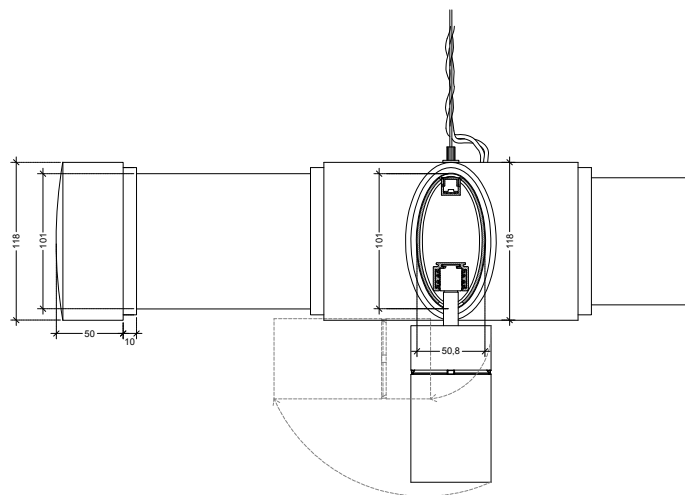

## Direct light


Type	LED HC
Voltage EU	48V - 220/240V driver into the system
Voltage USA	48V - 100/120V driver into the system
Wattage	17W
Lumen	1834lm
Color Temperature (K)	3000K CRI98+
Beam options	20°, 32°



Credits: Gucci Vienna

## Indirect light

Type	LED board
Voltage EU	24V - 220/240V driver into the system
Voltage USA	24V - 100/120V driver into the system
Wattage	24W/m or 30W/m
Lumen	2575lm/m or 3220lm/m
Color Temperature (K)	3000K Full Spectrum BIN 309

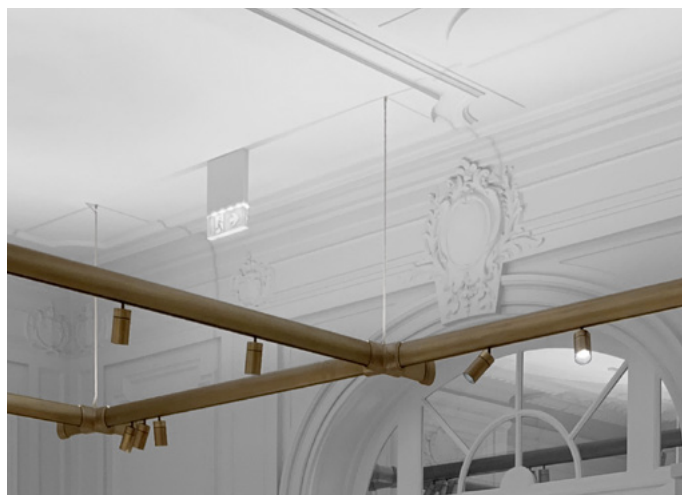

Credits: Gucci Bruxelles

Specification description



Credits: Gucci Bruxelles

Control gear / Ballast / Transformer @ Direct light		Control gear / Ballast / Transformer @ Indirect light	
Manufacturer	Meanwell PSU + Eldoled or Dalcnet	Manufacturer	Meanwell PSU + Eldoled or Tridonic
Reference	350W or 500W PSU + Controller	Reference	200W or 240W PSU + Controller
Type	-	Type	-
Voltage / frequency	-	Voltage / frequency	-
Wattage	-	Wattage	-
Dimming / addressable	DALI or 0-10V	Dimming / addressable	DALI or 0-10V
Other	meshBLE available option	Other	meshBLE available option

## Accessories



Honeycomb dense texture  
 Type: Optical  
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Opal lens  
 Type: Optical  
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

---

System elements



Cross joint - cast brass - antique brass or RAL powder-coated



Linear joint - cast brass - antique brass or RAL powder-coated



Terminal caps - cast brass - antique brass or RAL powder-coated



Twisted fabric wire - various color available on request