

Kontur


Design by Sebastian Herkner

Providing a framework for light, the Kontur collection serves as an elegant stage setting for the linear light source it contains. Its minimalist black frame pairs with different diffusers or reflectors in a poetic balance, creating myriad lighting ambiances.

Wall



6414

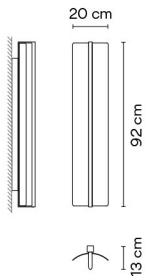

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED temperature colour
 /1_ 2700 K **E** →
 CRI >90 2381,3 lm 113 lm/W
 /2_ 3000 K **F** →
 CRI >90 2381,3 lm 113 lm/W
 /7_ 2200 K **F** →
 CRI >90 2041,15 lm 97,2 lm/W

Control
 6414 _ _ / _ 1
 DALI
 6414 _ _ / _ 3
 1-10V
 6414 _ _ / _ 5
 Push
 6414 _ _ / _ Z
 Casambi


Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 5,5 Kg Net weight 3,5 Kg



6416

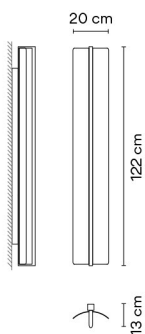

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED temperature colour
 /1_ 2700 K **E** →
 CRI >90 3153,9 lm 113 lm/W
 /2_ 3000 K **F** →
 CRI >90 3153,0 lm 113 lm/W
 /7_ 2200 K **F** →
 CRI >90 2703,32 lm 96,9 lm/W

Control
 6416 _ _ / _ 1
 DALI
 6416 _ _ / _ 3
 1-10V
 6416 _ _ / _ 5
 Push
 6416 _ _ / _ Z
 Casambi

Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz


Packaging
 1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 5,8 Kg Net weight 3,8 Kg



1160 10 / 1A

Model
Finish
LED temperature colour
Control

6418

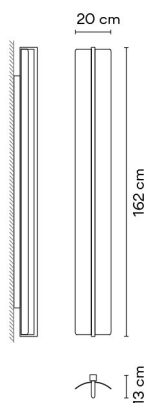

Finishes
● 11/ __ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K **E**
CRI >90 4205,2 lm 113 lm/W
/2 _ 3000 K **F**
CRI >90 4205,2 lm 113 lm/W
/7 _ 2200 K **F**
CRI >90 3604,42 lm 96,9 lm/W

Control

6418 __ / _ 1
DALI
6418 __ / _ 3
1-10V
6418 __ / _ 5
Push
6418 __ / _ Z
Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 0,175 m
Vol 0,1580 m³
Gross weight 6,5 Kg Net weight 4 Kg

LED IP20 CE EAC
Dimmer Multi-volt

6444

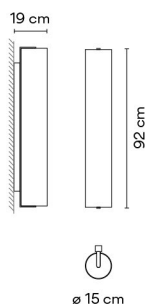

Finishes
● 11/ __ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K **E**
CRI >90 2381,3 lm 114 lm/W
/2 _ 3000 K **F**
CRI >90 2381,3 lm 114 lm/W
/3 _ 3500 K **E**
CRI >90 2551,44 lm 122,7 lm/W
/7 _ 2200 K **F**
CRI >90 2041,15 lm 98,1 lm/W

Control

6444 __ / _ 1
DALI
6444 __ / _ 3
1-10V
6444 __ / _ 5
Push
6444 __ / _ Z
Casambi

Materials

Glass shade: Opal triplex Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

LED IP20 CE EAC
Dimmer Multi-volt

6446

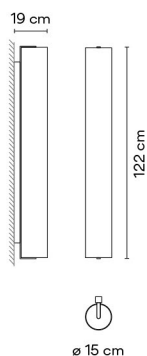

Finishes
● 11/ __ Black
(NCS S 8500-N)

LED temperature colour
/1 _ 2700 K **E**
CRI >90 3153,9 lm 113 lm/W
/2 _ 3000 K **F**
CRI >90 3153,0 lm 113 lm/W
/3 _ 3500 K **E**
CRI >90 3379,15 lm 121,1 lm/W
/7 _ 2200 K **F**
CRI >90 2703,32 lm 96,9 lm/W

Control

6446 __ / _ 1
DALI
6446 __ / _ 3
1-10V
6446 __ / _ 5
Push
6446 __ / _ Z
Casambi

Materials

Glass shade: Opal triplex Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg


LED IP20 CE EAC
Dimmer Multi-volt

Pendants




92 cm

6434

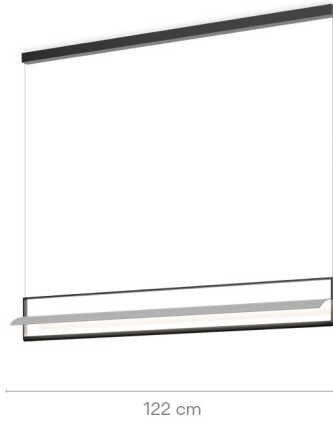

122 cm

6436

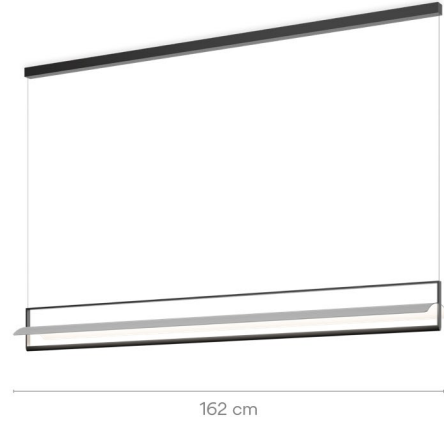

162 cm

6438



92 cm


6474



122 cm

6476

6434



Finishes
 ● **11/ _ _ Black**
 (NCS S 8500-N)

LED temperature colour
 /1 _ 2700 K **E** →
 CRI >90 2381,3 lm 114 lm/W
 /2 _ 3000 K **F** →
 CRI >90 2381,3 lm 114 lm/W
 /3 _ 3500 K **E** →
 CRI >90 2551,44 lm 122,7 lm/W
 /7 _ 2200 K **F** →
 CRI >90 2041,15 lm 98,1 lm/W

Control
6434 _ / _ 1
 DALI
6434 _ / _ 3
 1-10V
6434 _ / _ 5
 Push
6434 _ / _ Z
 Casambi

Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.


Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 5,5 Kg Net weight 3,5 Kg

Notes
 Extra cable length. **16,00 €/m**



6436



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED temperature colour
 /1 _ 2700 K **E** > CRI >90 3153,9 lm 113 lm/W
 /2 _ 3000 K **F** > CRI >90 3154,0 lm 113 lm/W
 /3 _ 3500 K **E** > CRI >90 3379,15 lm 121,1 lm/W
 /7 _ 2200 K **F** > CRI >90 2703,32 lm 96,9 lm/W

Control
 6436 __ / _ 1
 DALI
 6436 __ / _ 3
 1-10V
 6436 __ / _ 5
 Push
 6436 __ / _ Z
 Casambi

Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.


Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 5,8 Kg Net weight 3,8 Kg

Notes
 Extra cable length. 16,00 €/m



6438

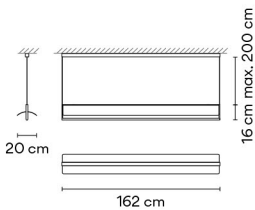

Finishes
 11/ __ Black
 (NCS S 8500-N)

LED temperature colour
 /1 _ 2700 K **E** > CRI >90 4205,2 lm 113 lm/W
 /2 _ 3000 K **F** > CRI >90 4205,2 lm 113 lm/W
 /3 _ 3500 K **E** > CRI >90 4505,53 lm 121,1 lm/W
 /7 _ 2200 K **F** > CRI >90 3604,42 lm 96,9 lm/W

Control
 6438 __ / _ 1
 DALI
 6438 __ / _ 3
 1-10V
 6438 __ / _ 5
 Push
 6438 __ / _ Z
 Casambi

Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.


Light Source and electronics
 1 x LED STRIP 37,2 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,75 m
 Vol 0,158 m³
 Gross weight 6,5 Kg Net weight 4 Kg

Notes
 Extra cable length. 16,00 €/m



6474



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED temperature colour
 /1 _ 2700 K **E** > CRI >90 2381,3 lm 114 lm/W
 /2 _ 3000 K **F** > CRI >90 2381,3 lm 114 lm/W
 /7 _ 2200 K **F** > CRI >90 2041,15 lm 98,1 lm/W

Control
 6474 __ / _ 1
 DALI
 6474 __ / _ 3
 1-10V
 6474 __ / _ 5
 Push
 6474 __ / _ Z
 Casambi

Materials
 Glass shade: Opal triplex. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 6,2 Kg Net weight 3,7 Kg

Notes
 Extra cable length. 16,00 €/m



6476


Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED temperature colour

/1_ 2700 K	LED
CRI >90	3153,9 lm 113 lm/W
/2_ 3000 K	F
CRI >90	3153,0 lm 113 lm/W
/7_ 2200 K	F
CRI >90	2703,32 lm 96,9 lm/W

Control

6476 __ / _ 1
DALI
6476 __ / _ 3
1-10V
6476 __ / _ 5
Push
6476 __ / _ Z
Casambi



Materials
 Glass shade: Opal triplex. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,75 x 0,45 x 1,35 m
 Vol 0,122 m³
 Gross weight 9 Kg Net weight 6 Kg

Notes
 Extra cable length. 16,00 €/m

