

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendants

Height 70 cm



Ø 37 cm

1800



Ø 55 cm


1815

Height 110 cm




Ø 37 cm

1805




Ø 55 cm

1820



Ø 83 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 55 cm

1825



Ø 83 cm

1835



Ø 124 cm

1845

Height 70 cm



Ø 55 cm

1850

Height 110 cm



Ø 55 cm

1855



Ø 83 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 55 cm

1860



Ø 83 cm


1870



Ø 124 cm

1880

1800



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 2662 lm 121 lm/W


- Control**
- 1800 __ / _ 3
1-10V
- 1800 __ / _ D
Push; DALI-2
- 1800 __ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1805



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 2662 lm 121 lm/W


- Control**
- 1805 __ / _ 3
1-10V
- 1805 __ / _ D
Push; DALI-2
- 1805 __ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1810



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 2662 lm 121 lm/W

- Control**
- 1810 __ / _ 3
1-10V
- 1810 __ / _ D
Push; DALI-2
- 1810 __ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,6 Kg Net weight 5,4 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1815



- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 3993 lm 121 lm/W

- Control**
- 1815 _ / _ 3
1-10V
- 1815 _ / _ D
Push; DALI-2
- 1815 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,4 Kg Net weight 6,2 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1820

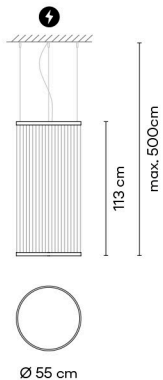

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 3993 lm 121 lm/W

- Control**
- 1820 _ / _ 3
1-10V
- 1820 _ / _ D
Push; DALI-2
- 1820 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1825

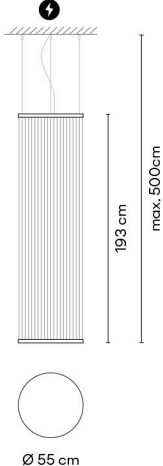

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 3993 lm 121 lm/W

- Control**
- 1825 _ / _ 3
1-10V
- 1825 _ / _ D
Push; DALI-2
- 1825 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg





Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1830



Ø 83 cm

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1830 __ / _ 3
1-10V
- 1830 __ / _ D
Push; DALI-2
- 1830 __ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90-305Vac 50/60Hz



Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 13,5 Kg Net weight 9,5 Kg



Multi-volt Dimmer

- Select Electrical connection
- _10 Surface
 - _24 Built-in S
 - _31 Remote Micro

1835

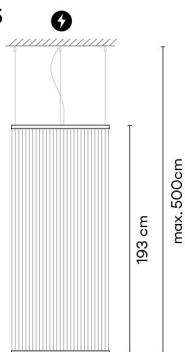

Ø 83 cm

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W


- Control**
- 1835 __ / _ 3
1-10V
- 1835 __ / _ D
Push; DALI-2
- 1835 __ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90-305Vac 50/60Hz



Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 14,1 Kg Net weight 10,1 Kg



Multi-volt Dimmer

- Select Electrical connection
- _10 Surface
 - _24 Built-in S
 - _31 Remote Micro

1840



Ø 124 cm

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 9196 lm 121 lm/W

- Control**
- 1840 __ / _ 3
1-10V
- 1840 __ / _ D
Push; DALI-2
- 1840 __ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19 Kg Net weight 13 Kg




Multi-volt Dimmer

- Select Electrical connection
- _10 Surface
 - _24 Built-in S
 - _31 Remote Micro

1160 | 10 | /1A | 18

Model | Finish | LED Colour Temperature | Control | Electrical connection

1845

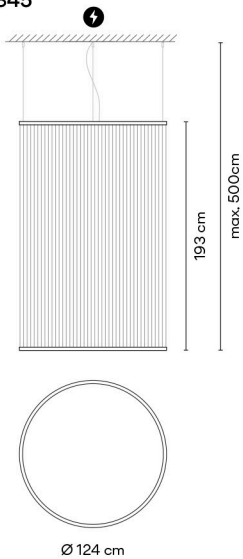

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1_ 2700 K CRI >90 9196 lm 121 lm/W

Control
1845 _ _ / _ 3
1-10V
1845 _ _ / _ D
Push; DALI-2
1845 _ _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg


LED IP20

Multi-volt Dimmer

Select Electrical connection
_10 Surface
_24 Built-in S
_31 Remote Micro



1850



- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K CRI >90 3993 lm 121 lm/W

- Control**
- 1850 _ _ / _ 3
1-10V
- 1850 _ _ / _ D
Push; DALI-2
- 1850 _ _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 7,9 Kg Net weight 5,7 Kg




Multi-volt Dimmer

Select Eletrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1855

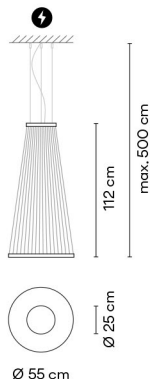

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K CRI >90 3993 lm 121 lm/W


- Control**
- 1855 _ _ / _ 3
1-10V
- 1855 _ _ / _ D
Push; DALI-2
- 1855 _ _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,3 Kg Net weight 6,1 Kg




Multi-volt Dimmer

Select Eletrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1860

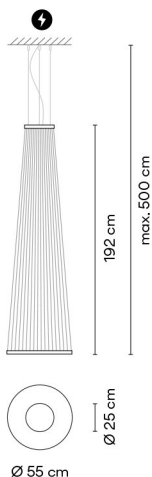

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1 _ 2700 K CRI >90 3993 lm 121 lm/W


- Control**
- 1860 _ _ / _ 3
1-10V
- 1860 _ _ / _ D
Push; DALI-2
- 1860 _ _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,7 Kg Net weight 6,5 Kg




Multi-volt Dimmer

Select Eletrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1865

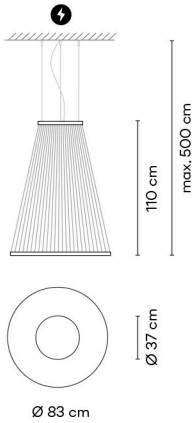

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1865 _ / _ 3
1-10V
- 1865 _ / _ D
Push; DALI-2
- 1865 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1870

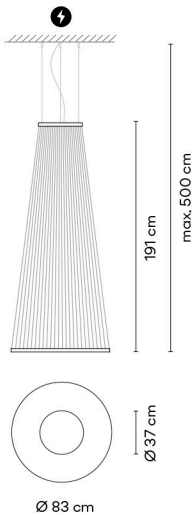

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1870 _ / _ 3
1-10V
- 1870 _ / _ D
Push; DALI-2
- 1870 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 12,4 Kg Net weight 9,4 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1875

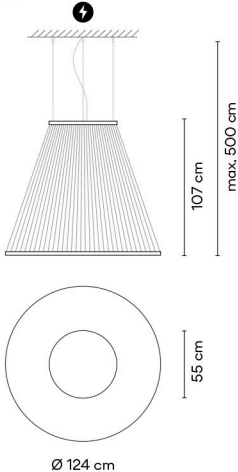

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 9196 lm 121 lm/W

- Control**
- 1875 _ / _ 3
1-10V
- 1875 _ / _ D
Push; DALI-2
- 1875 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 15,9 Kg Net weight 11,9 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1880

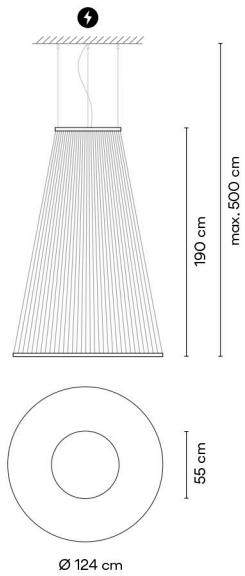

<p>Finishes (threads)</p> <ul style="list-style-type: none"> ● 24/ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ Terra Red (NCS S4040-Y70R) ● 47/ _ Green L1 (NCS S 4005-G80Y) 	<p>LED Colour Temperature</p> <p>/1_ 2700 K CRI >90 9196 lm 121 lm/W</p>	<p>Control</p> <p>1880 _ / _ 3 1-10V</p> <p>1880 _ / _ D Push; DALI-2</p> <p>1880 _ / _ Z Casambi</p>
<p>Finishes (rings and canopy)</p> <ul style="list-style-type: none"> ● Black (NCS S 8500-N) 		
<p>Materials</p> <p>Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR.</p>		
<p>Light Source and electronics</p> <p>1 x LED STRIP 76W 48V Constant Voltage 48V 90-305Vac 50/60Hz</p>		
<p>Packaging</p> <p>1 Box 1,35 x 1,35 x 0,12 m Vol 0,2187 m³ Gross weight 16,8 Kg Net weight 12,8 Kg</p>		
<p>Notes</p> <p>Additional cable length personalisation 16,00 €/m</p>		
<p>LED IP20 </p> <p>Multi-volt Dimmer </p>		

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

Electrical connection options

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm
for plaster ceilings.
Black finish.

_24 Built-in S



Ø 8 cm
height 6 cm
black finish.

_10 Surface



Ø 25,5 cm
height 4,5 cm
black finish.



Ø 37,5 cm
height 4,5 cm
black finish.