

PANZERI

Candle

220-240V AC ON-OFF
L09501.000.0401

white




Data sheet

CODE	L09501.000.0401
SYSTEM POWER CONSUMPTION	4W
EFFICACY	59.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	286lm
LUMEN OUTPUT	238lm
EFFICIENCY	83.2%
WEIGHT	0,62 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	13,0 x 65,0 x 13,0



Technical drawing

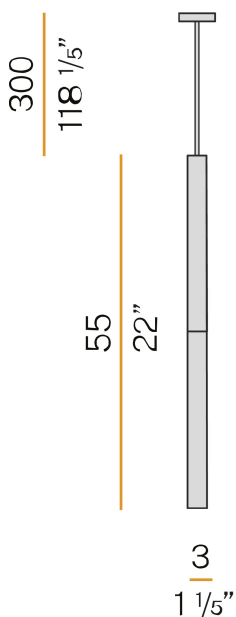

Suspension lighting fixture for interiors, with direct and indirect light emission. Turned steel structure in white polyacrylic paint. Turned aluminium heat sink. Diffuser in partially mat borosilicate glass tube. 3m (118,1") long suspension and power cable in transparent PVC. Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in white polyacrylic paint.

Polar diagram

