



SPALYS43
Design by Ryosuke Fukusada

Collection consisting of aluminium suspended lamps.
Available in several colours and sizes.

Typology: SUSPENSION LAMP

Ratings

- Built in line voltage **LED** module
- CCT 3000 K, 2700 K
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off dimmable trailing edge
- Die cast aluminium body, painted
- Opalescent diffuser


SP ALYS 43

kg 3.2 m³ 0.06

Product code composition

ALYSOID

Type	Article	Colours	Catene / chains	Source
SP	ALYS 43	AN anthracite grey wrinkled	NI black polished nickel	LED 15W - diffused beam 3000K*, 2700K upon request
			OT natural brass	

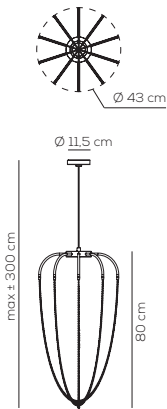

IP20 CRI90 220-240VAC **LED** ~1375 lm* ~92 lm/W*

example composition code SP ALYS43 AN NI LED

Available colors



OT
Anthracite grey and natural brass

NI
Anthracite grey and black polished nickel

SPALYS43AN _ _ LED

CUSTOMER _____

NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.