



PLBEL180
Design by Manuel Vivian

Collection consisting of suspended and ceiling lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colours and sizes.


Typology: CEILING

Ratings

- E27
- Downlight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame
- Light covering in jersey

PL BEL 180

kg 27 m³ 2.64

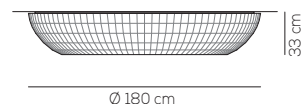

Product code composition

BELL / diffusore INCLUSO / diffuser INCLUDED

Type	Article	Colours	Finish	Source
PL	BEL 180 E27	BC white BW warm white GI gold yellow NE black RS red	XX	E27 5 x Max 16W LED or 5 x Max 46W halogen

CE IP20 +LED 220-240V_{ac}


example composition code PL BEL180E27 BW XX



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,18	0,65	1,18	1,80	2,60	3,10	3,40	1,84	1,86

Available colors

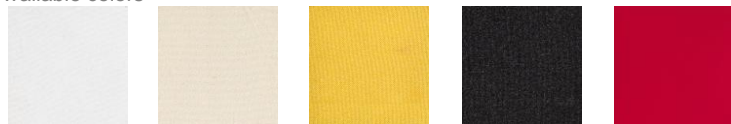

BC White **BW** Warm white **GI** Gold yellow **NE** Black **RS** Red

Altri colori disponibili su richiesta / Other colors available upon request.

SPBEL180E27 _ _ XX CUSTOMER _____ NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.