



SP LAY B

Design by Vanessa Vivian

Collection consisting of suspended lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colours and sizes. Screw fitting light source.

Typology: SUSPENSION LAMP


Ratings

- E27
- Diffused light
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame

SP LAY B

kg 48.5 m³ 2.06

Product code composition

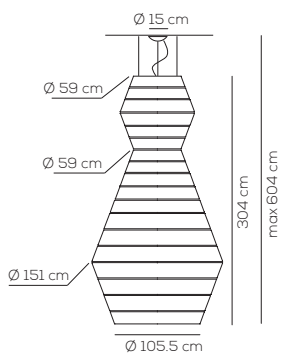

LAYERS

| Type | Article | Colours | Code End | Source |
|------|--------------|---------------------------|----------|---|
| SP | LAY B XX E27 | BC white BW warm white | XX | E27 15 x Max 16W LED or 15 x Max 70W halogen |

CE IP20 +LED 220-240V_{AC}
example composition code SP LAYBXXE27 BW XX



Equivalent Sound Absorption Area (A) in m² per lamp

| FREQUENCY | 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ | 8000 HZ | 125-8000 HZ | 500-2000 HZ |
|-----------|--------|--------|--------|---------|---------|---------|---------|-------------|-------------|
| A | 0,33 | 2,33 | 4,12 | 5,56 | 7,65 | 9,54 | 11,22 | 5,82 | 5,78 |

Available colors



BC
White

BW
Warm
white

SPLAYBXXE27_XX

CUSTOMER _____ NOTES _____

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.