



PLUL1120 - recessed
PLUL2120 - recessed
 Design by Timo Ripatti

Collection consisting of wall lamps, ceiling lamps and suspended lamps in aluminium.
 Available in several colours and sizes.
 Available with sound absorbing panel option.

Typology: WALL, CEILING


Ratings

- Built in **LED** module
- CCT 3000 K or 2700K
- Wallward light (wall), downlight or uplight (ceiling)
- Surface installation over holes (legs) and in ceiling cut-out (recessed canopy)
- Supply voltage 24VDC
- Switch mode: on-off
- Dimmable 0-10V LED driver
- Painted aluminium profile 23 x 23 mm
- Opalescent diffuser

PL UL 1: kg 3.2 m3 0.150
 PL UL 2: kg 3.6 m3 0.150

Product code composition

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED

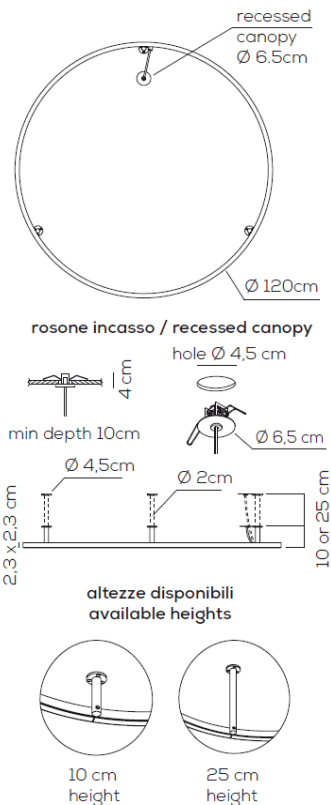

Type	Article	Colours	Version	Source
PL	UL 1 120 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 74W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request
	UL 2 120 LED (h25 cm)	RU rust brown		

CE IP20 CRI90 **LED** ~7354 lm* 99 lm/W* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).
 Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

-for optional drivers or dimming technology please refer to our pricelist or contact our representatives

-sound absorbing option upon request- for info see www.axolight.eu/u-light/u-light-sound-absorbing.pdf

Available colors



EELc (Energy Efficiency Label compatibility) contain built in LED lamps that cannot be changed: A, A+, A++

PLUL _ 120LED _ _ IN CUSTOMER _____ NOTES _____

Luminous flux (lm) and efficacy (lm/W) for all built-in LED luminaires is based on nominal ratings of the LED sources.
 Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.