



SP URBAN MI
Design by Dima Loginoff

Collection consisting of aluminium ceiling lamps and suspended lamps.
Available in several colours and sizes.

Typology: RECESSED SUSPENSION LAMP

Ratings


- Built in **LED** module
- Supply voltage: 34.7Vdc 500mA
- CCT 2700K, 3000K* or 3500K
- IP20
- Surface installation over holes
- Dimmable with dedicated PSU
- Aluminum body painted
- Diffuser opalescent

kg 2,1 m³ 0,025

Product code composition

URBAN / DRIVER NOT INCLUDED

Type	Article	Recessed	CCT	Colours	LED Source
SP	URBAN M	I	1 2700K	BC wrinkled white	LCC 17.5W - diffused beam
			2 3000K*	BR matt bronze	
			3 3500K	NI matt nickel	

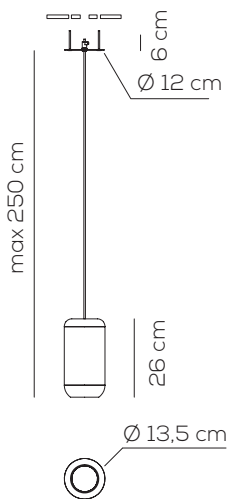

34.7Vdc 500mA **LED** ~2200 lm* 125lm/W*
 example composition code **SP URBANM I 1 NI LED**

Available colors



CUSTOMER _____ NOTES _____

SPURBANM I ___ LCC _____

Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.