



**SPVEL100**  
Design by Manuel Vivian


Collection of ceiling and suspended lamps. The radial diffuser and light covering are treated with a flame-retardant (Glow wire 960 °C and 750°C respectively). Available in several colours and sizes.

Typology: SUSPENDED

Ratings

- E27
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame, painted
- Radial cone diffuser in pongé fabric and light covering in jersey

**SP VEL 100**  
kg 17,5 m³ 1.16

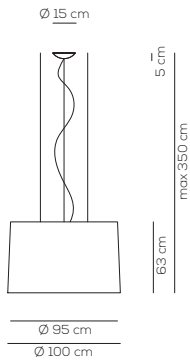

Product code composition

VELVET / diffusore INCLUSO, con illuminazione verso alto e basso / diffuser INCLUDED, with upward and downward lighting

Type	Article	Colours (lampshade)	Colour (Radial diffuser)
SP	VEL 100 E27	BC ice white	BC white
		BA ivory white	GI gold yellow
		BL blue	MA brown
		MA brown	MT brick red
		NE black	NE black

Source  
E27 4 x Max 20W LED or  
4 x Max 57W halogen



IP20 +LED

220-240Vac

example composition code SP VEL100E27 MA BC



Equivalent Sound Absorption Area (A) in m<sup>2</sup> per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,58	0,89	0,95	0,85	0,87	1,27	1,87	1,04	0,89

Available lampshade colors



BC  
Ice white


BA  
Ivory white

BL  
Blue

MA  
Brown

NE  
Black

Available radial diffuser colors



BC  
White

BW  
Warm white

SPVEL100E27\_ \_ \_ \_

CUSTOMER \_\_\_\_\_

NOTES \_\_\_\_\_

NOTICE:  
Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.  
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.