



**SPVEL160**  
Design by Manuel Vivian

Collection of suspended lamps. The radial diffuser and light covering are treated with a flame-retardant (Glow wire 960 °C and 750°C respectively). Available in several colours and sizes.


Typology: SUSPENDED

Ratings

- Built in **LED** module
- CCT 3000 K
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Dimmable DALI LED driver
- Steel frame, painted
- Radial cone diffuser in pongé fabric and light covering in jersey

**SP VEL 160 LED**

kg 25 m<sup>3</sup> 4.32

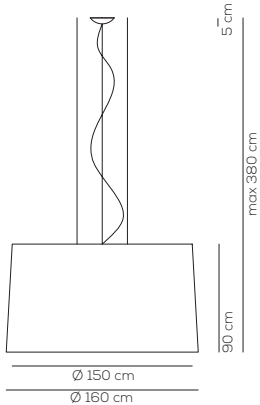

Product code composition

VELVET / diffuser INCLUDED, with upward and downward lighting / DRIVER INCLUDED

Type	Article	Colours (lampshade)	Colour (Radial diffuser)	Source
SP	VEL 160 LED	BC ice white	BC white	LED 98W - diffused beam 3000K*, 4000K
		BA ivory white	GI gold yellow	
		BL blue	MA brown	
		MA brown	MT brick red	
		NE black	NE black	

~10719 lm\* 109 lm/W\* 110-240VAc  
 example composition code SP VEL160LED MA BC



Equivalent Sound Absorption Area (A) in m<sup>2</sup> per lamp


FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	1,41	2,32	2,29	1,87	1,98	3,08	4,53	2,50	2,05

Available lampshade colors



BC Ice white      BA Ivory white      BL Blue      MA Brown      NE Black

Available radial diffuser colors



BC White      BW Warm white

SPVEL160LED\_\_\_\_\_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.