


PANZERI

To-be

220-240V AC ON-OFF
L02721.045.1701

 gold leaf

DIRECT
LIGHT


Data sheet

CODE	L02721.045.1701
SYSTEM POWER CONSUMPTION	10W
EFFICACY	80.6lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	35°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	806lm
LUMEN OUTPUT	806lm
EFFICIENCY	100%
WEIGHT	1,19 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	14,0 x 65,0 x 14,0



Suspension lighting fixture for interiors, with direct light emission.
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.
Pickled sheet metal wiring support brackets in polyacrylic paint.
Anodized extruded aluminium heat sink.
Reflector in thermoplastic material with chrome plated finish.
Transparent polycarbonate screen.
Pickled sheet metal end cap in polyacrylic paint.
2m (78,7") long suspension and power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and extruded aluminium covering in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.

Technical drawing

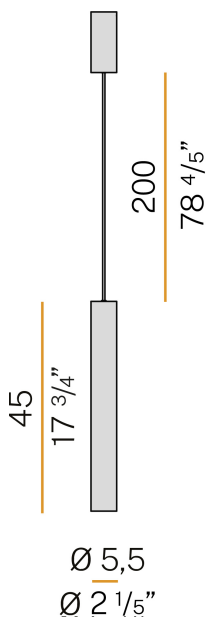

Polar diagram

