



SPBEL180
Design by Manuel Vivian

Collection consisting of suspended and ceiling lamps with a metal frame covered with strips of extra smooth flame-retardant pongé fabric. Available in several colours and sizes.

Typology: SUSPENDED

Ratings


- E27
- Downlight and uplight
- Surface installation over holes
- Supply voltage ~220-240V
- Switch mode: on-off
- Steel frame
- Opalescent diffuser

SP BEL 180

kg 39 m³ 5.7

Product code composition

BELL / diffusore INCLUSO, con illuminazione verso alto e basso / *diffuser INCLUDED, with upward and downward lighting*

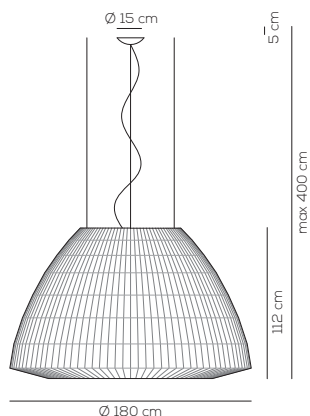

Type	Article	Colours	Finish	Source E27
SP	BEL 180 E27	BC white BW warm white GI gold yellow NE black RS red	XX	4 x Max 16W + 1 x Max 9,5W LED or 4 x Max 57W + 1 x Max 46W halogen

CE IP20 +LED 220-240V_{AC}

example composition code SP BEL180E27 GI XX



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	1,55	2,65	3,56	4,65	5,68	6,38	7,10	4,51	4,63

Available colors



BC White BW Warm white GI Gold yellow NE Black RS Red

Altri colori disponibili su richiesta / *Other colors available upon request.*

SPBEL180E27 _ _ XX

CUSTOMER _____ NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.