



SP KWIC
S. & R. Cornelissen

Collection consisting of steel and aluminum ceiling/wall lamps, suspended and floor lamps with opaline blown glass diffuser. Available in two colours and two sizes. Built-in dimmable LED light source.


Typology: suspended

Ratings

- Built in **LED** module
- CCT 3000 K
- diffused beam
- Surface installation over holes
- Supply voltage ~110-240V
- Switch mode: on-off
- Aluminum-Steel body

SP KWIC 48

kg 3.2 m³ 0,074

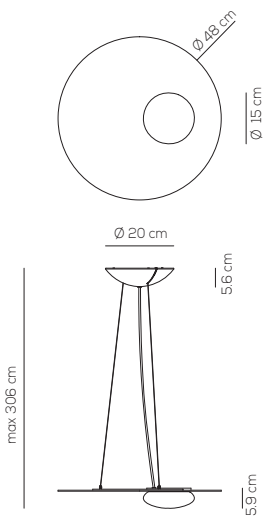

Product code composition

KWIC / DRIVER INCLUDED


Type	Article	Colours	Finishings	Source
SP	KWIC 48	NE intense black BR transparent bronze BC white upon request	XX	LED 18W - diffused beam 3000K*, 2700K, 3500K upon request

110-240VAC **LED** ~2255 lm* ~125 lm/W*
 example composition code **SP KWIC 48 XX XX LED**

Available colors



NE
Intense black



BR
Transparent bronze

Considering the craftsmanlike manufacturing of the product and the special finishing process, always by hand, you may find different appearances and shades between one product and another and they are to consider as absolute distinction of the item.

SPKWIC48 __ XXLED

CUSTOMER _____

NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all built in LED luminaires is based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.