Plumbeo code: C19AL-0007-D03R00



Specification description

Description

O Chandelier / Pendant Lamp

O LED Source

Lighting fixture description

Degree of protection IP/IK

Color / finish

Metal: aluminum, gold 24kt plated or different galvanic finishing Diffuser: inward or outward PMMA diffuser, flat milky or microprismatic



Switch (Table, Floor only)	-
Flex color (Table, Floor only)	transparent
Flex lenght (Table, Floor only)	-
Physical dimensions	D. 1500 mm x Section H. 35 mm x W. mm + 2000 mm adjustable wire

IP20

Shade (Glass, Fabric only)

Accessories needed for installation

Plug

Lamp		Control gear / Ballast / Transformer	
Manufacturer	AggioLight	Manufacturer	Tridonic
Reference	2218 24V 14.4W/m MEXSTR0054	Reference	LCA 100W 24V one4all SC PRE
Туре	LED	Туре	Driver 24V
Voltage	24V - 220/240V driver included	Voltage / frequency	ref. datasheet
Wattage	70W	Wattage	ref. datasheet
Lumen	4700lm	Dimming / addressable	1%-100% DALI DT 6, DSI, switchDIM
Color Temperature (K)	3000K CRI90+	Other	
Lamp life	-		


15


. . . .




Specification description

Measures

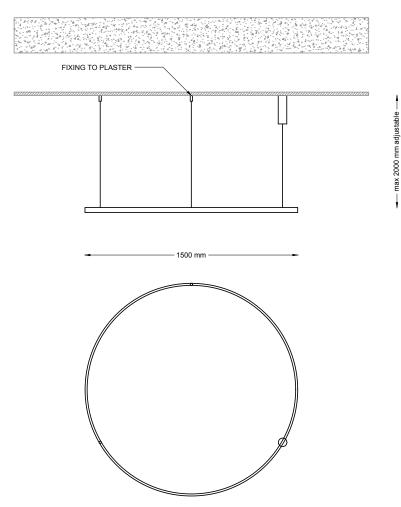



.IN Inward light option



.OT Outward light option

Metal Finishings:



.

.