

Specification description

Description

- O Chandelier / Pendant Lamp
- O LED Source

Lighting fixture description

Degree of protection IP/IK	IP20
Color / finish	Metal: aluminum, gold 24kt plated or different galvanic finishing Diffuser: inward or outward PMMA diffuser, flat milky or microprismatic



Switch (Table, Floor only)	-
Flex color (Table, Floor only)	transparent
Flex lenght (Table, Floor only)	-
Physical dimensions	D. 2000 mm x Section H. 35 mm x W. 15 mm + 2000 mm adjustable wire
Shade (Glass, Fabric only)	-

Accessories needed for installation

Plug	-
------	---


Lamp		Control gear / Ballast / Transformer	
Manufacturer	AggioLight	Manufacturer	Tridonic
Reference	2218 24V 14.4W/m MEXSTR0054	Reference	LCA 100W 24V one4all SC PRE
Type	LED	Type	Driver 24V
Voltage	24V - 220/240V driver included	Voltage / frequency	ref. datasheet
Wattage	90W	Wattage	ref. datasheet
Lumen	6300lm	Dimming / addressable	1%-100% DALI DT 6, DSI, switchDIM
Color Temperature (K)	3000K CRI90+	Other	-
Lamp life	-		




Plumbeo code: C19AL-0007-Do4Roo

Specification description

Measures




FIXING TO PLASTER

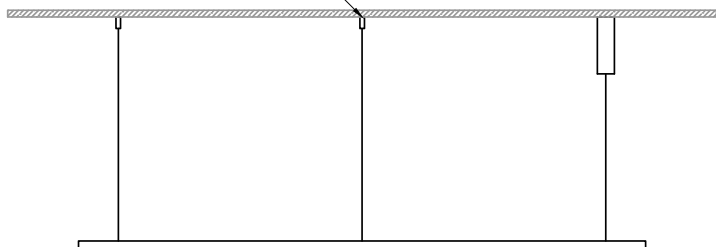


max 2000 mm adjustable


2000 mm

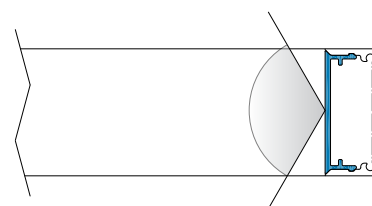

.IN Inward light option

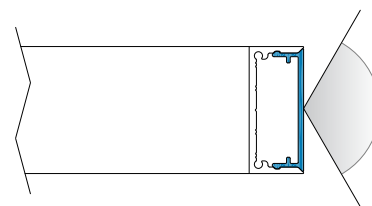

.OT Outward light option

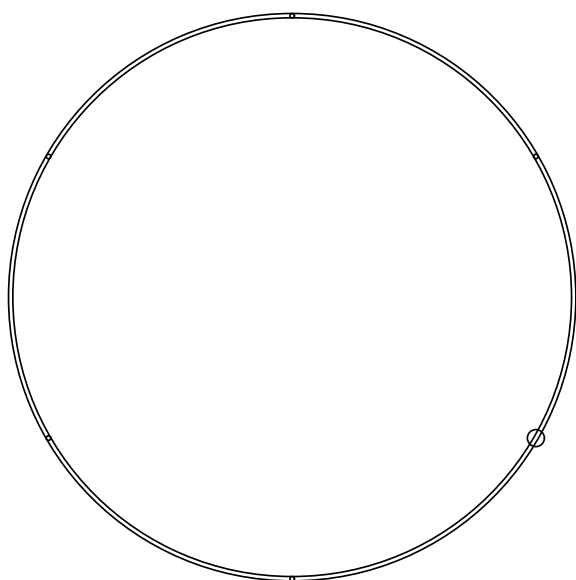

Metal Finishings:




Chrome plated

Available:
O Polished
O Satin



Nickel plated

Available:
O Polished
O Satin



Black Nickel plated

Available:
O Polished
O Satin



Gold 24kt plated

Available:
O Polished
O Satin




Antique brass

Available:
O Glossy
O Matt



Brass

Available:
O Polished
O Satin
+ anti fingerprint



Copper

Available:
O Polished
O Satin
+ anti fingerprint




Aluminum

Available:
O Anodized



Gold leaf



Silver leaf



Copper leaf