PANZERI

Bella

24V DC M05301.011.0510

Data sheet

CODE	M05301.011.0510
SYSTEM POWER CONSUMPTION	4,5W
EFFICACY	97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	460lm
LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,22 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	13,0 x 24,0 x 12,0

INDIRECT LIGHT

Multiple suspension lighting fixture for interiors, with indirect light emission. Die-cast aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.

Modelled acrylic diffuser with mat finish.


Pickled sheet metal closing disk in polyacrylic paint.

Suspension kit with rod in brass tube in polyacrylic paint.

3m (118,1") long suspension and power cable in transparent PVC.

Provided without power canopy, complete with cable clamp on the cable's free extremity.

CE ERE 🗵

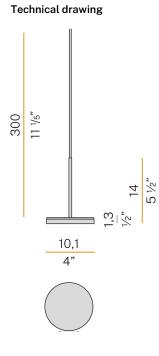

Polar diagram

white

PANZERI

Bella

Accessories / structure

YPL05207.015



Ivory pleated fabric lampshade, simple snap installation.



PANZERI

Bella

Accessories / fixing

XM8901-03 LED C€ [ff] 🗵 🐨	Canopy for power supply and suspension up to 3 24V DC constant voltage models maximum.	<u>42</u> 16 ⁵ /9″
XM8901-05 LED C C EHI 🗵 ŵ	Canopy for power supply and suspension up to 5 24V DC constant voltage models maximum.	
XM8901-06 LED	Canopy for power supply and suspension up to 6 24V DC constant voltage models maximum.	42 16 %*
XM9201-01 C€ Efft ≚ ๗	Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.	