

PANZERI

To-be


24V DC
M02601.065.0510

white




Data sheet

CODE	M02601.065.0510
SYSTEM POWER CONSUMPTION	5,3W
EFFICACY	72,6lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	550lm
LUMEN OUTPUT	363lm
EFFICIENCY	66%
WEIGHT	0,54 Kg
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	8,0 x 75,0 x 8,0




Multiple suspension lighting fixture for interiors, with direct light emission. Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating. Extruded aluminium heat sink. Modelled polycarbonate diffuser with opaline finish. Turned brass end cap in polyacrylic paint. 2m (78,7") long suspension and power cable in transparent PVC. Provided without power canopy, complete with cable clamp on the cable's free extremity.

Technical drawing

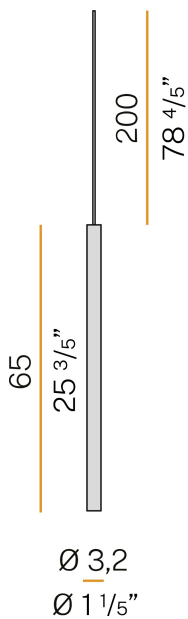

Polar diagram

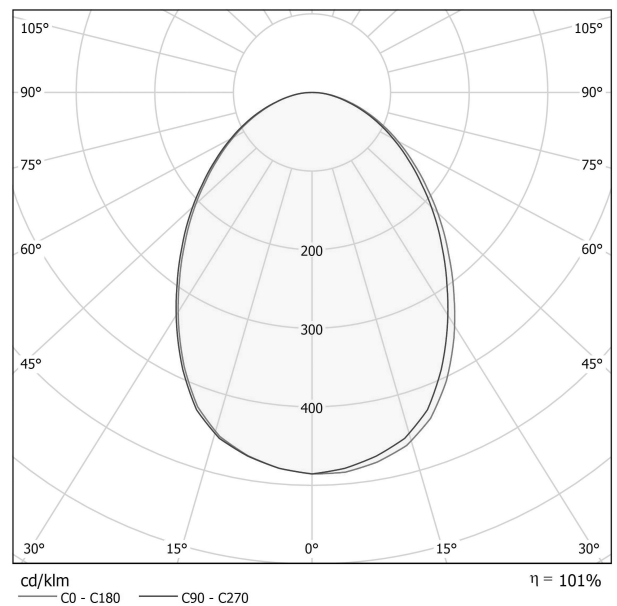


PANZERI

To-be

Accessories / canopy


XM8901-03 LED

Canopy for power supply and suspension up to 3 24V DC constant voltage models maximum.




XM8901-05 LED

Canopy for power supply and suspension up to 5 24V DC constant voltage models maximum.



XM8901-06 LED

Canopy for power supply and suspension up to 6 24V DC constant voltage models maximum.



XM9201-01

Recessed canopy for electric cable suspensions. Suitable for 24V fixtures: remote driver 24V needed.

