
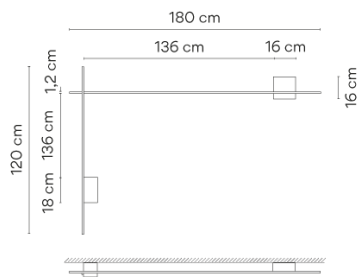


## 2615

Design By Arik Levy

Wall light that marks coordinates with a rectilinear language, connects points of light in space, relates planes and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

### Model Sheet

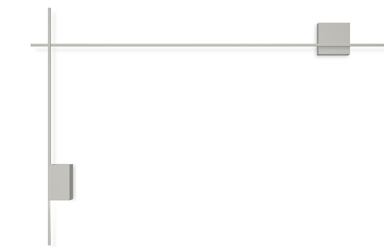

**Finish**


- 21 Black Grey  
NCS S 7000-N
- 15 Grey L2  
NCS S 2500-N

**LED temperature color** 3000 K / 3500 K / 4000 K

**Dimming** CASAMBI / DALI / 1-10V




**Installation type** Surface Canopy

**Materials** Body: Aluminum  
Diffuser: Polycarbonate  
Profile: Aluminum

**LED**  CRI>90  
3000 K / 3500 K / 4000 K

**Driver** Constant Voltage 110-240 V V  
50-60 Hz HZ

**Remarks** Only one main input by square box  
16x16cm.

  **Dimmable** **LED**  
**IP20** **Multi-volt** **50-60Hz** 


**Application** Wall Lamps

**Packaging** 2 Box  
0.224 m x 0.325 m x 0.37 m  
Gross weight 4.6  
Net weight 2.55  
Vol. 0.0361

#### Lighting effect

##### General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



#### Photometric Data

**Efficiency** 100.00%  
**Coordinate System** CG  
**Total Flux** 378.81 lm  
**Maximum Value** 438.41 cd/klm

#### Other Applications



All of our products come with a five-year warranty. Check our legal terms at [www.vibia.com/warranty](http://www.vibia.com/warranty)

Vibia Lighting, S.L.U.

Office / Oficina  
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971  
Spain / Portugal T +34 934 796 970

customer.service@vibia.com  
vibia.com