


## 2617

Design By Arik Levy

Wall light that marks coordinates with a rectilinear language, connects points of light in space, relates planes and underlines the architectural dimension. Indirect lighting and composition based on volumes clarify light and shade.

### Model Sheet

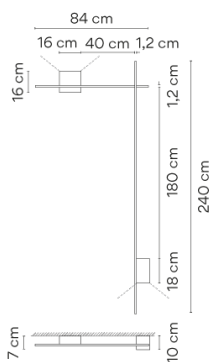


<b>Finish</b>	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #cccccc; border-radius: 50%; margin-right: 5px;"></span> 15 Grey L2 NCS S 2500-N</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333333; border-radius: 50%; margin-right: 5px;"></span> 21 Black Grey NCS S 7000-N</li> </ul>
<b>LED temperature color</b>	3000 K
<b>Dimming</b>	1-10V <b>Optional</b> DALI or Casambi Min. quantity, upcharge and extra lead time apply [EN]
<b>Installation type</b>	Surface Canopy
<b>Materials</b>	Body: Aluminum Diffuser: Polycarbonate Profile: Aluminum
<b>LED</b>	CRI>90 3000 K
<b>Driver</b>	CV - Constant Voltage [object Object] 110-240 V 50/60 HZ
<b>Remarks</b>	Only one main input by square box 16x16cm.
	<div style="display: flex; gap: 5px; align-items: center;"> <span></span> <span></span> <span>Dimmable</span> <span>LED</span> </div> <div style="display: flex; gap: 5px; align-items: center; margin-top: 5px;"> <span></span> <span></span> <span>50-60Hz</span> <span></span> </div>

<b>Application</b>	Wall Lamps
<b>Packaging</b>	2 Box 0.224 m x 0.325 m x 0.37 m Gross weight 5.2 Net weight 2.8 Vol. 0.0384

#### Lighting effect

##### General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



#### Photometric Data

<b>Efficiency</b>	100.00%
<b>Coordinate System</b>	CG
<b>Total Flux</b>	378.81 lm
<b>Maximum Value</b>	166.08 cd

#### Other Applications



All of our products come with a five-year warranty. Check our legal terms at [www.vibia.com/warranty](http://www.vibia.com/warranty)