
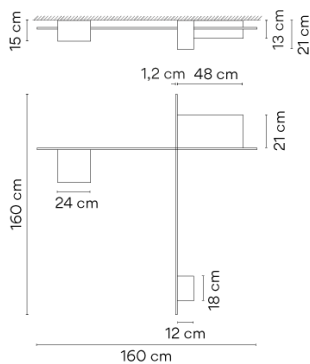


2647

Design By Arik Levy

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order.

Model Sheet

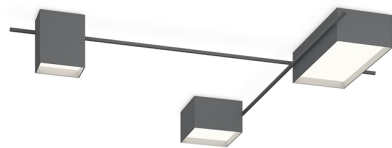


Finish	<ul style="list-style-type: none"> 15 Grey L2 NCS S 2500-N 21 Black Grey NCS S 7000-N
LED temperature color	3000 K
Dimming	1-10V Optional DALI or Casambi Min. quantity, upcharge and extra lead time apply [EN]
Installation type	Surface Canopy
Materials	Body: Aluminum Diffuser: Polycarbonate Profile: Aluminum
LED	CRI>90 3000 K
Driver	CV - Constant Voltage [object Object] 110-240 V 50/60 HZ
Remarks	Main input by the biggest box
	<div style="display: flex; gap: 5px; align-items: center;"> Dimmable LED </div> <div style="display: flex; gap: 5px; align-items: center; margin-top: 5px;"> IP20 Bi-volt 50-60Hz </div>

Application	Ceiling Lamps
Packaging	4 Box 0.38 m x 0.61 m x 0.22 m Gross weight 13.1 Net weight 10.35 Vol. 0.1148

Lighting effect

General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric Data

Efficiency	69.34 lm/W
Coordinate System	CG
Total Flux	5200.43 lm
Maximum Value	2251.45 cd

Other Applications



All of our products come with a five-year warranty.
Check our legal terms at www.vibia.com/warranty