

Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating sculptural pieces integrated in the architecture.

Wall

2600

16 cm



2602

26 cm



2610

120 cm



2612

240 cm



2615

180 cm



2617

84 cm




2620

87 cm 56 cm



2600



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- Finish customization**
(Available options:
Vibia colour palette)
- LED temperature colour**
- /2 _ 3000 K CRI >90 756,73 lm 126 lm/W
 - /3 _ 3500 K CRI >90 763,3 lm 127,2 lm/W

Control

- 2600 __ / _ 1 DALI-2
- 2600 __ / _ 3 1-10V
- 2600 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.


Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 1,35 Kg Net weight 0,9 Kg

2602



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K CRI >90 1513,46 lm 126 lm/W
 - /3 _ 3500 K CRI >90 1526,5 lm 127,2 lm/W
- Finish customization**
 (Available options:
 Vibia colour palette)

- Control**
- 2602 __ / _ 1 DALI-2
 - 2602 __ / _ 3 1-10V
 - 2602 __ / _ Z Casambi


Materials
 Diffuser: Polycarbonate. Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 1 Box 0,4 x 0,4 x 0,2 m
 Vol 0,032 m³
 Gross weight 2,85 Kg Net weight 1,9 Kg

Notes
 * Electrical connection point.

2610



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K CRI >90 1513,46 lm 126 lm/W
 - /3 _ 3500 K CRI >90 1526,5 lm 127,2 lm/W
- Finish customization**
 (Available options:
 Vibia colour palette)

- Control**
- 2610 __ / _ 1 DALI-2
 - 2610 __ / _ 3 1-10V
 - 2610 __ / _ Z Casambi


Materials
 Diffuser: Polycarbonate. Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics
 1 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,036 m³
 Gross weight 3,6 Kg Net weight 2,4 Kg

Notes
 * Electrical connection point.

2612



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K CRI >90 1513,46 lm 126 lm/W
 - /3 _ 3500 K CRI >90 1526,5 lm 127,2 lm/W
- Finish customization**
 (Available options:
 Vibia colour palette)

- Control**
- 2612 __ / _ 1 DALI-2
 - 2612 __ / _ 3 1-10V
 - 2612 __ / _ Z Casambi


Materials
 Diffuser: Polycarbonate. Main body: Aluminum.
 Structures: Aluminum.

Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,042 m³
 Gross weight 3,9 Kg Net weight 2,6 Kg

Notes
 * Electrical connection point.

2615



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K
 - CRI >90 1513,46 lm 126 lm/W
 - /3 _ 3500 K
 - CRI >90 1526,5 lm 127,2 lm/W

Finish customization
(Available options:
Vibia colour palette)

- Control**
- 2615 __ / _ 1 DALI-2
 - 2615 __ / _ 3 1-10V
 - 2615 __ / _ Z Casambi


Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Packaging
2 Boxes
Total Vol 0,038 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

Notes
* Electrical connection point.

2617



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K
 - CRI >90 1513,46 lm 126 lm/W
 - /3 _ 3500 K
 - CRI >90 1526,5 lm 127,2 lm/W

Finish customization
(Available options:
Vibia colour palette)

- Control**
- 2617 __ / _ 1 DALI-2
 - 2617 __ / _ 3 1-10V
 - 2617 __ / _ Z Casambi


Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Packaging
2 Boxes
Total Vol 0,041 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

Notes
* Electrical connection point.

2620



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K
 - CRI >90 1513,46 lm 126 lm/W
 - /3 _ 3500 K
 - CRI >90 1526,5 lm 127,2 lm/W

Finish customization
(Available options:
Vibia colour palette)

- Control**
- 2620 __ / _ 1 DALI-2
 - 2620 __ / _ 3 1-10V
 - 2620 __ / _ Z Casambi

Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Packaging
2 Boxes
Total Vol 0,0356 m³
Gross weight 3,6 Kg Net weight 2,4 Kg


Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

Notes
* Electrical connection point.


1160 10 /1A

Model Finish
LED temperature colour Control

Ceiling

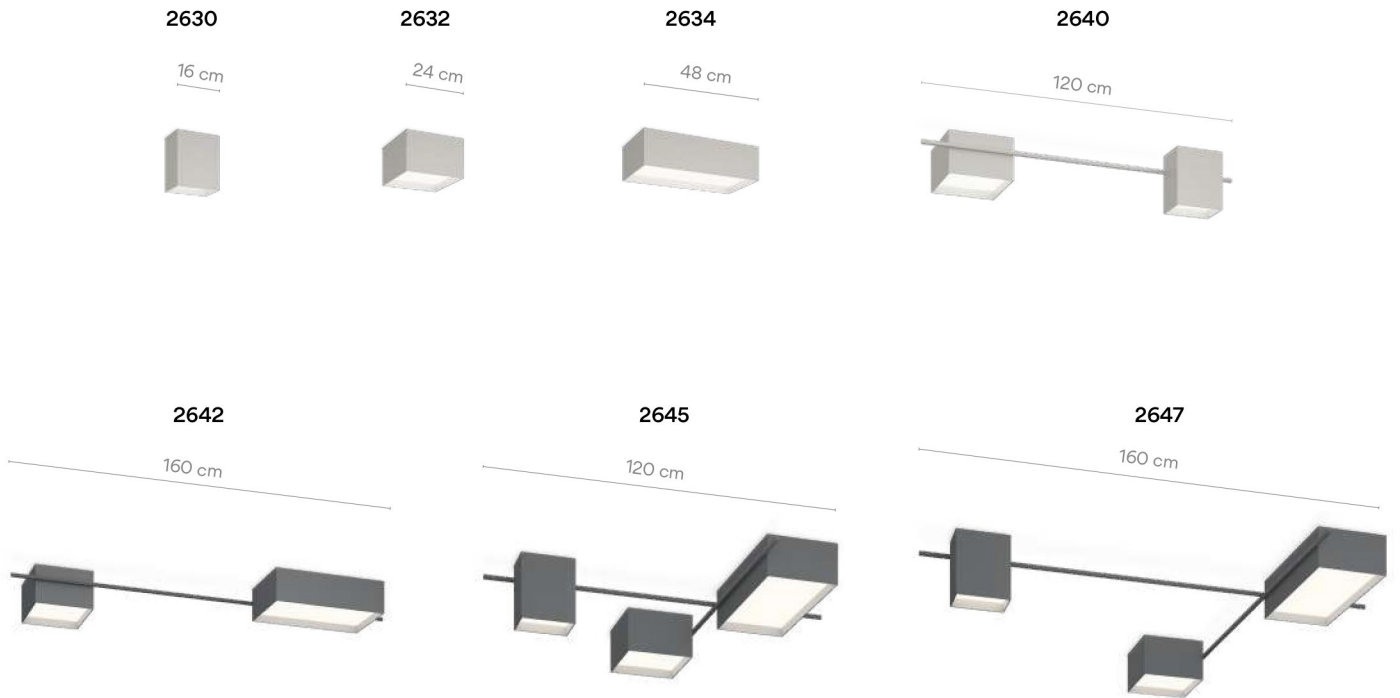

2630



- Finishes**
- 21/ __ Black Grey (NCS S 0300-N)
 - 15/ __ Grey L2 (NCS S 2500-N)
- LED temperature colour**
- /2 _ 3000 K
 - CRI >90 1078 lm 120 lm/W
 - /3 _ 3500 K
 - CRI >90 1087,3 lm 120,8 lm/W

Finish customization
(Available options:
Vibia colour palette)

Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics
1 x LED PLATE 24V 9 W
Constant Voltage 24V
110-240V 50/60Hz

Control

2630 __ / _ 1
DALI-2

2630 __ / _ 3
1-10V

2630 __ / _ Z
Casambi

Packaging
1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 3,75 Kg Net weight 2,5 Kg



2632



Finishes

- **21/ __ Black Grey** (NCS S 0300-N)
- **15/ __ Grey L2** (NCS S 2500-N)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- /2 _ 3000 K  CRI >90 2214 lm 148 lm/W
- /3 _ 3500 K  CRI >90 2233,1 lm 148,9 lm/W

Control

2632 __ / _ 1
DALI-2

2632 __ / _ 3
1-10V

2632 __ / _ Z
Casambi


Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,34 x 0,34 x 0,25 m
Vol 0,029 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

2634





Finishes

- **21/ __ Black Grey** (NCS S 0300-N)
- **15/ __ Grey L2** (NCS S 2500-N)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- /2 _ 3000 K  CRI >90 4428 lm 148 lm/W
- /3 _ 3500 K  CRI >90 4466,2 lm 148,9 lm/W

Control

2634 __ / _ 1
DALI-2






2634 __ / _ 3
1-10V

2634 __ / _ Z
Casambi


Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,58 x 0,34 x 0,23 m
Vol 0,045 m³
Gross weight 5,85 Kg Net weight 3,9 Kg

2640



Finishes

- **21/ __ Black Grey** (NCS S 0300-N)
- **15/ __ Grey L2** (NCS S 2500-N)

Finish customization
(Available options: Vibia colour palette)

LED temperature colour

- /2 _ 3000 K  CRI >90 3292 lm 137 lm/W
- /3 _ 3500 K  CRI >90 3320,4 lm 138,3 lm/W

Control

2640 __ / _ 1
DALI-2

2640 __ / _ 3
1-10V





2640 __ / _ Z
Casambi

Materials
Diffuser: Polycarbonate. Main body: Aluminum.
Structures: Aluminum.


Light Source and electronics
1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,15 m³
Gross weight 8,25 Kg Net weight 5,5 Kg

Notes
* Electrical connection point.

2642




<p>Finishes</p> <ul style="list-style-type: none"> ● 21/ __ Black Grey (NCS S 0300-N) ● 15/ __ Grey L2 (NCS S 2500-N) <p>Finish customization (Available options: Vibia colour palette)</p>	<p>LED temperature colour</p> <p>/2 _ 3000 K CRI >90 6642 lm 148 lm/W</p> <p>/3 _ 3500 K CRI >90 6699,3 lm 148,9 lm/W</p>	<p>Control</p> <p>2642 __ / _ 1 DALI-2</p> <hr/> <p>2642 __ / _ 3 1-10V</p> <hr/> <p>2642 __ / _ Z Casambi</p>
---	--	--

<p>Materials</p> <p>Diffuser: Polycarbonate. Main body: Aluminum. Structures: Aluminum.</p> <p>Light Source and electronics</p> <p>1 x LED PLATE 24V 15 W 1 x LED PLATE 24V 30 W Constant Voltage 24V 110-240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 0,25 x 0,60 x 1,7 m Vol 0,255 m³ Gross weight 11,25 Kg Net weight 7,5 Kg</p> <p>Notes</p> <p>* Electrical connection point.</p>
--	---



2645




<p>Finishes</p> <ul style="list-style-type: none"> ● 21/ __ Black Grey (NCS S 0300-N) ● 15/ __ Grey L2 (NCS S 2500-N) <p>Finish customization (Available options: Vibia colour palette)</p>	<p>LED temperature colour</p> <p>/2 _ 3000 K CRI >90 7720 lm 143 lm/W</p> <p>/3 _ 3500 K CRI >90 7786,6 lm 144,2lm/W</p>	<p>Control</p> <p>2645 __ / _ 1 DALI-2</p> <hr/> <p>2645 __ / _ 3 1-10V</p> <hr/> <p>2645 __ / _ Z Casambi</p>
---	---	--

<p>Materials</p> <p>Diffuser: Polycarbonate. Main body: Aluminum. Structures: Aluminum.</p> <p>Light Source and electronics</p> <p>1 x LED PLATE 24V 9 W 1 x LED PLATE 24V 15 W 1 x LED PLATE 24V 30 W Constant Voltage 24V 110-240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 0,25 x 1,2 x 1,2 m Vol 0,42 m³ Gross weight 14,25 Kg Net weight 9,25 Kg</p> <p>Notes</p> <p>* Electrical connection point.</p>
---	--



2647



<p>Finishes</p> <ul style="list-style-type: none"> ● 21/ __ Black Grey (NCS S 0300-N) ● 15/ __ Grey L2 (NCS S 2500-N) <p>Finish customization (Available options: Vibia colour palette)</p>	<p>LED temperature colour</p> <p>/2 _ 3000 K CRI >90 7720 lm 143 lm/W</p> <p>/3 _ 3500 K CRI >90 7786,6 lm 144,2 lm/W</p>	<p>Control</p> <p>2647 __ / _ 1 DALI-2</p> <hr/> <p>2647 __ / _ 3 1-10V</p> <hr/> <p>2647 __ / _ Z Casambi</p>
---	--	--

<p>Materials</p> <p>Diffuser: Polycarbonate. Main body: Aluminum. Structures: Aluminum.</p> <p>Light Source and electronics</p> <p>1 x LED PLATE 24V 9 W 1 x LED PLATE 24V 15 W 1 x LED PLATE 24V 30 W Constant Voltage 24V 110-240V 50/60Hz</p>	<p>Packaging</p> <p>1 Box 0,25 x 1,7 x 1,7 m Vol 0,72 m³ Gross weight 15,3 Kg Net weight 10,2 Kg</p> <p>Notes</p> <p>* Electrical connection point.</p>
---	---

